




ЕМАЙЛИРАНИ БУФЕРНИ СЪДОВЕ

Ø530 / 50 - 120Lt




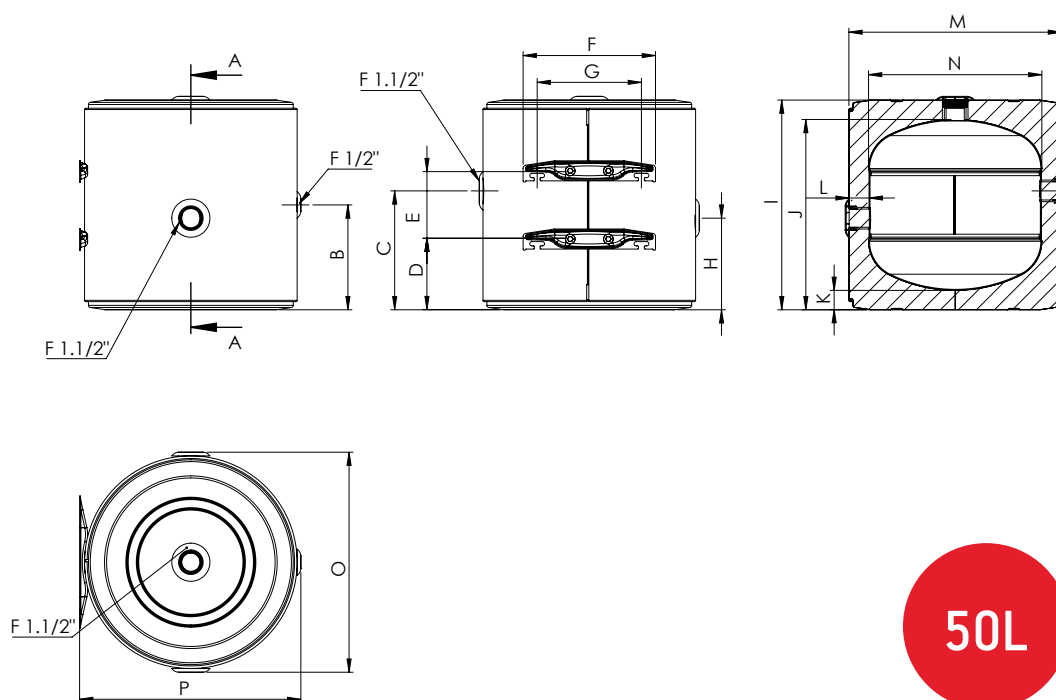

50L

МОДЕЛ	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
50 L	261	296	178	166	330	260	228	523	474	48	50	Ø530	Ø432	548	551


Размери (mm)

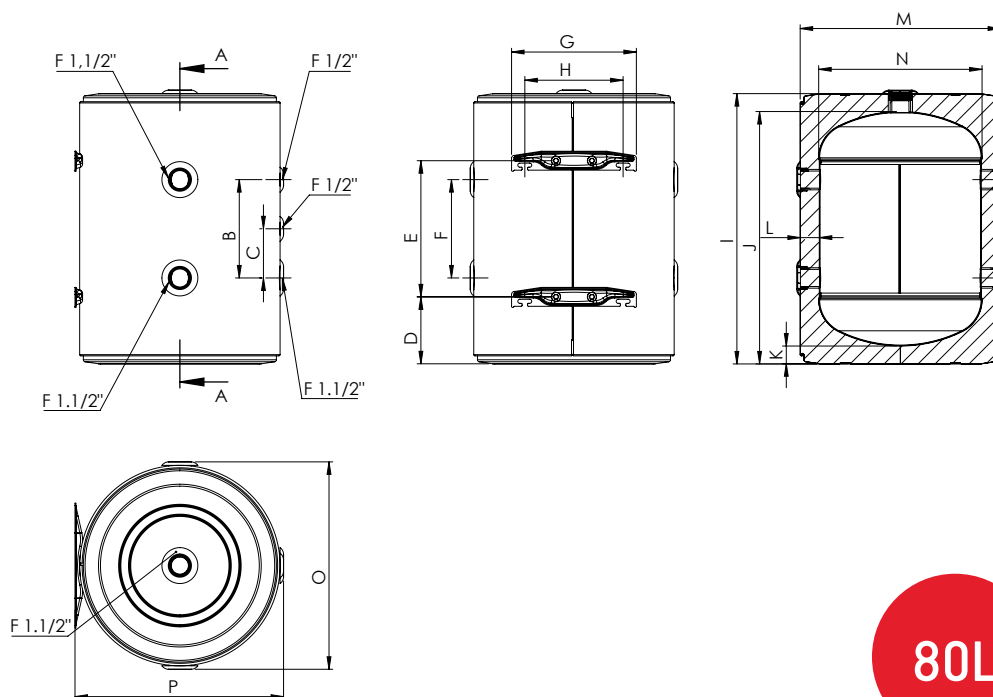

80L

МОДЕЛ	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
80L	260	130	177	360	260	330	260	715	667	48	50	Ø530	Ø432	548	551


Размери (mm)

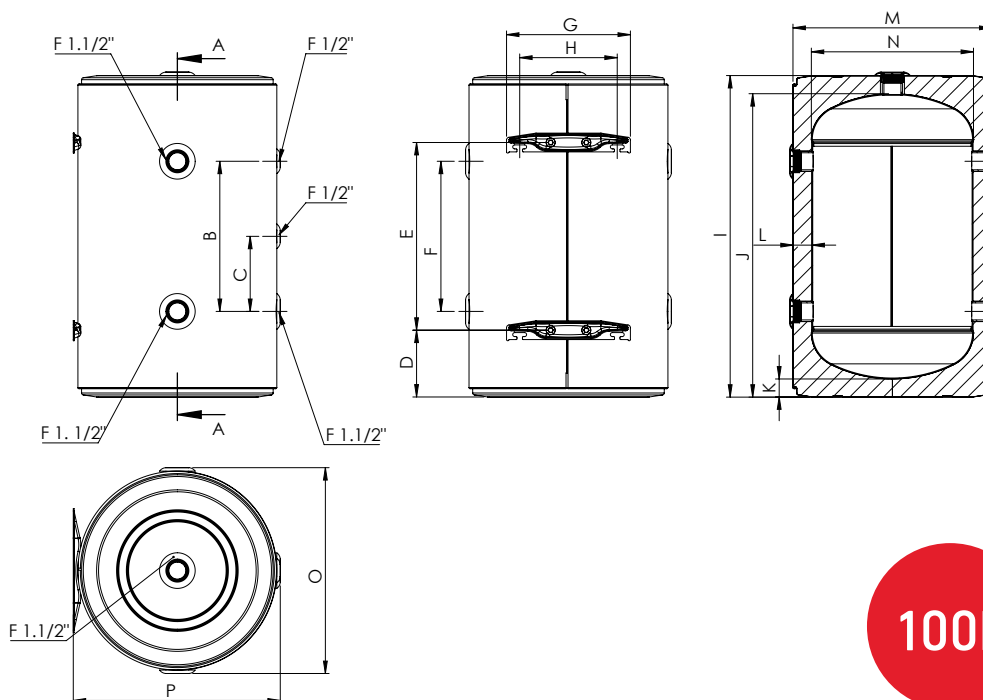

100L

МОДЕЛ	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
100L	400	200	178	500	400	330	260	857	808	48	50	Ø530	Ø432	548	551

Размери (mm)

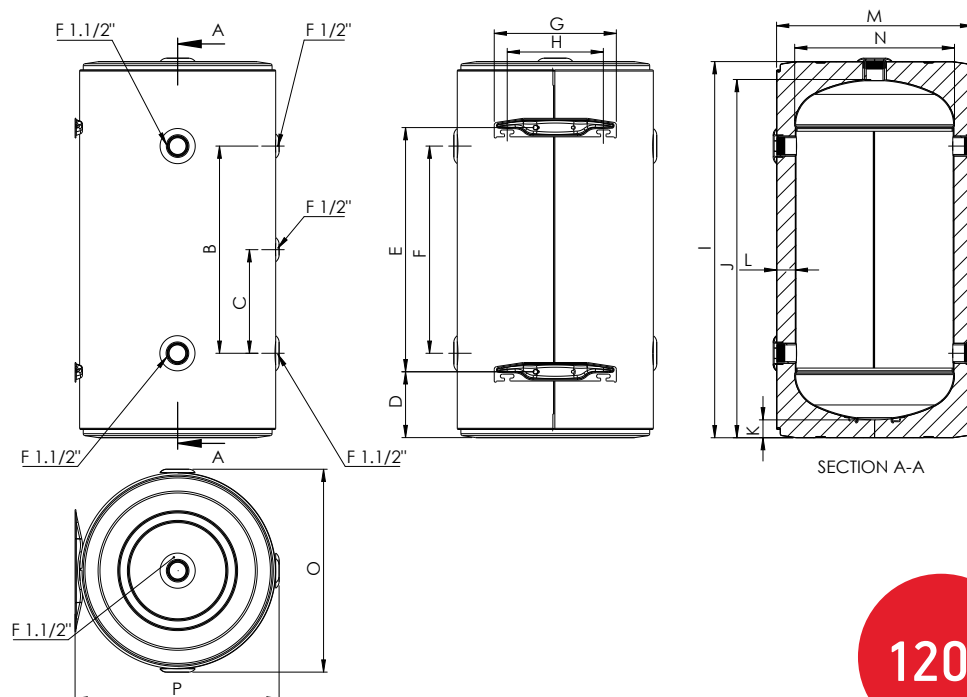

120L

МОДЕЛ	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
120L	560	280	178	660	560	330	260	1017	968	48	50	Ø530	Ø432	548	551

Размери (mm)



ЕМАЙЛИРАНИ БУФЕРНИ СЪДОВЕ

Ø530 / 50 - 120Lt

ТЕХНИЧЕСКА СПЕЦИФИКАЦИЯ

МОДЕЛ		50lt Ø530	80lt Ø530	100lt Ø530	120lt Ø530
Обем	Lt	50	80	100	120
Максимално работно налягане	bar	8			
Изолация експандиран полиуретан	mm	50			
Тегло (празен)	kg	24	31	36	41
Тестово налягане	bar	12			
Максимална работна температура	°C	95			

